Sirius Remote Panel
Setup

26 Pin
Back connector

Kit includes:
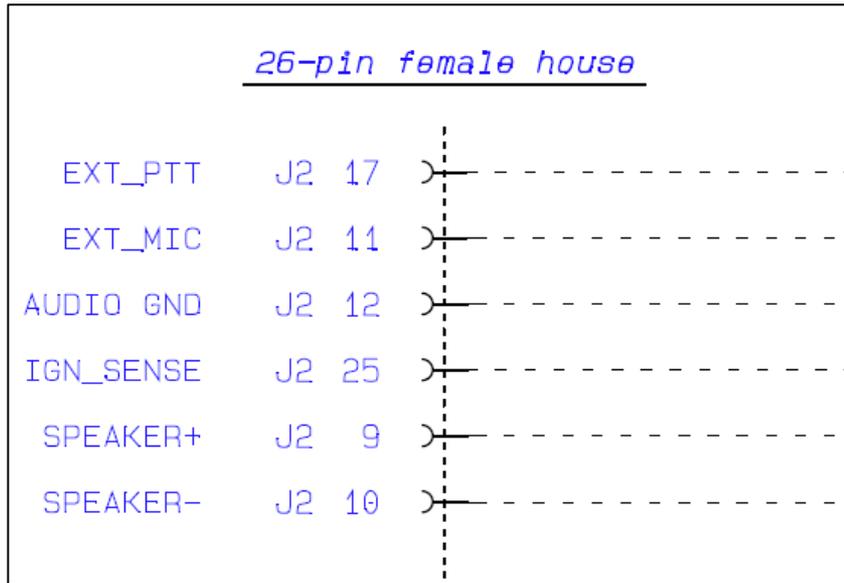- **Sirius Panel with fixed 3m cable**
- **26 pin connector to MotoTrbo back port**

Sirius Remote Panel Setup

26-pin female house

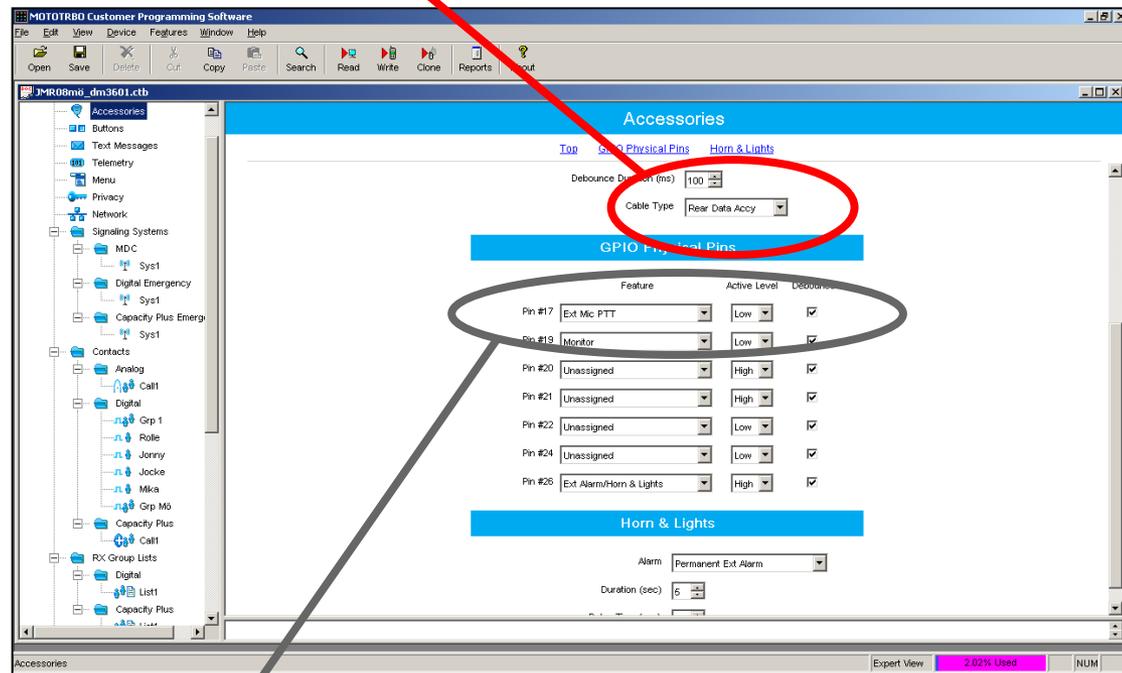|		
EXT_PTT	J2	17
EXT_MIC	J2	11
AUDIO GND	J2	12
IGN_SENSE	J2	25
SPEAKER+	J2	9
SPEAKER-	J2	10

**Recommended connectors
for ignition sense,
microphone and speaker**

Radio settings

One setting has to be changed in the radio for Sirius to get access. All other settings are default but might need to be checked if something is not working as intended.

The setting to change is "Cable Type" on the Accessories page:
Set to "Rear Data Accessory"

To use the external microphone you also need to set:
GPIO Pin #17 to Ext Mic PTT, active Low.

Radio Programming

The radio is not good at switching its USB connection between different use, so please note that when you change back and forth between using the Sirius Panel and the programming cable on the radio, you will mostly need to reboot the radio. Especially if you are programming the radio from the front connector.

Radio Firmware

We recommend that the radio has firmware version R02.30.00 or higher.